



EnGenius EPG5000 Setup Guide

1. Download the Zappie firmware file for the EnGenius EPG5000 if you haven't done so already and save it to your computer.
2. Don't install any CD's shipped with the router. If there is a sticker covering the LAN ports peel it off.
3. Plug the blue "WAN" port into your modem or internet source, plug your computer into the yellow LAN port 1. Make sure your computers network settings are set to DHCP or Automatic.
4. Open your internet browser and navigate to <http://192.168.0.1/>, you'll be taken to EnGenius set up wizard.

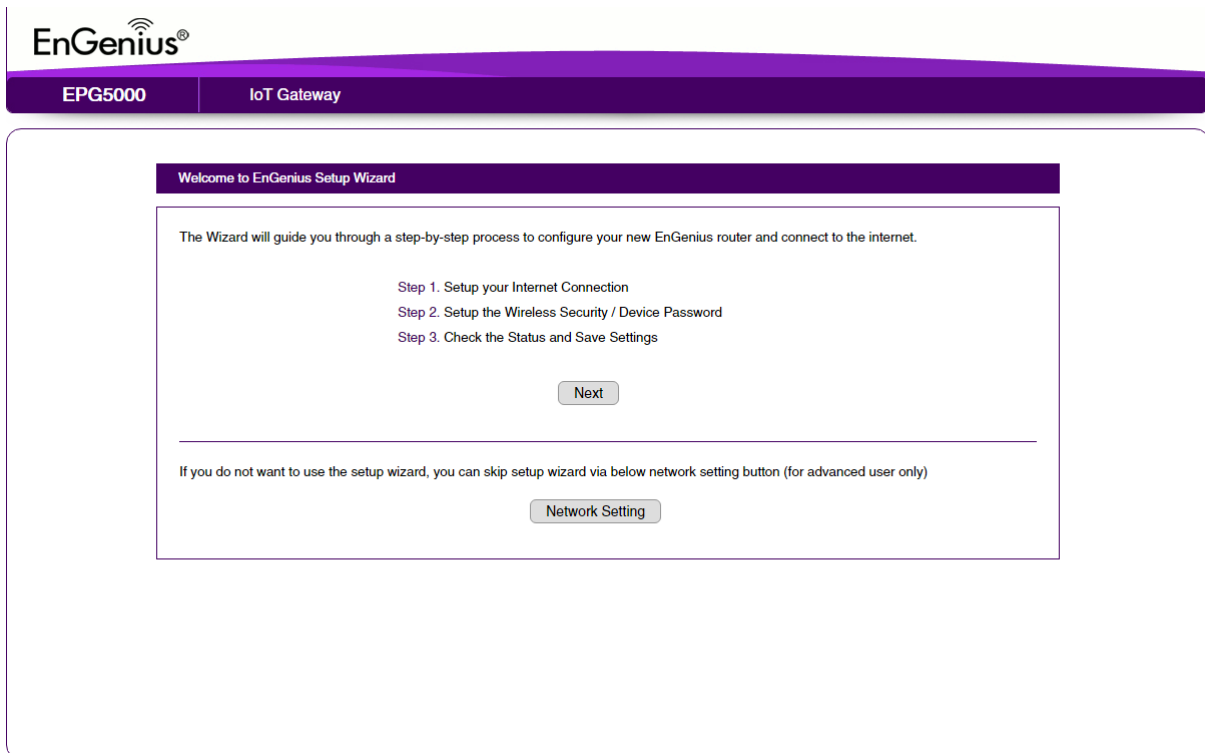


5. Click "Network Settings" at bottom of page.

6. You'll be taken to the router administrative login page.

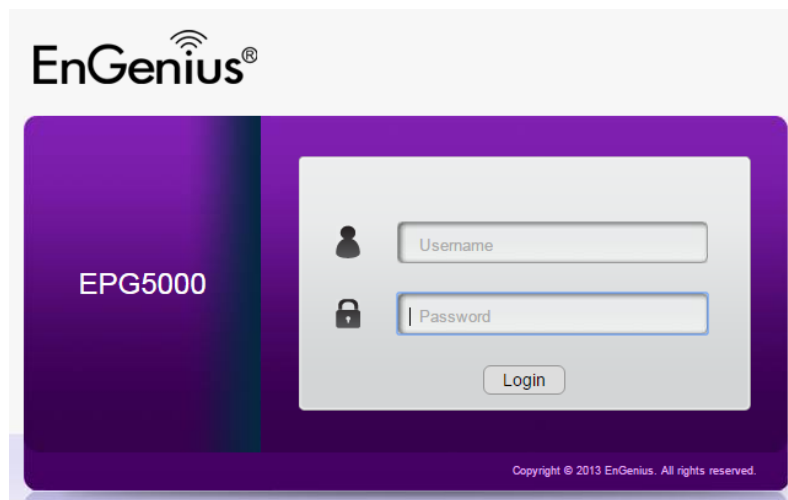

7. The username is admin and the password is admin.

8. Once logged in, click the network settings icon in top right menu as shown in the following:

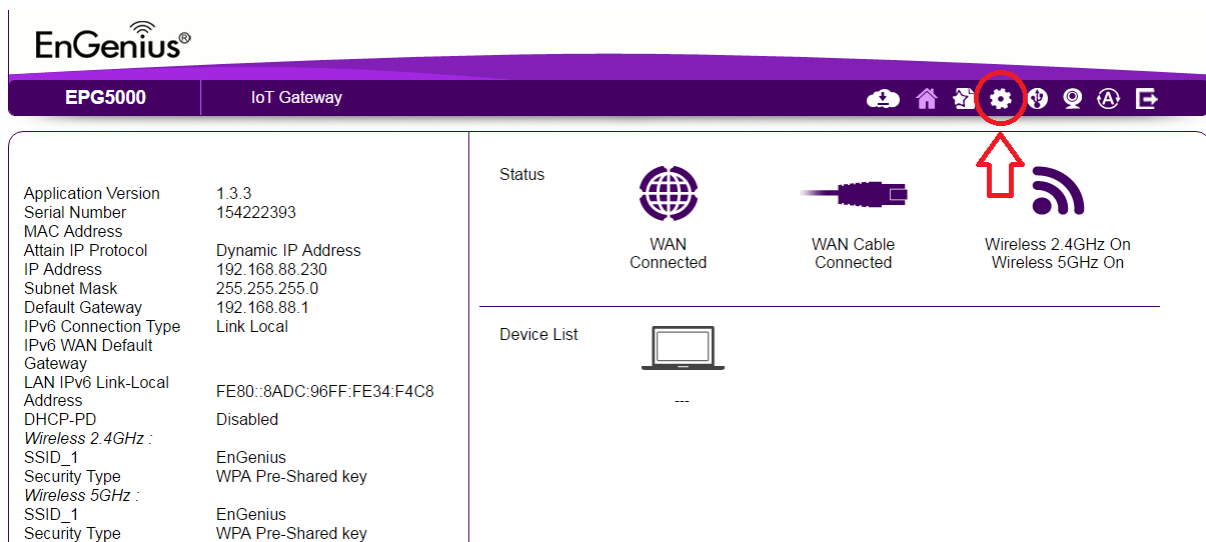

9. Scroll down the page and click “Tools” on the left hand menu, then click firmware in the sub menu under Tools.

Device Management

- System
- Internet
- Status
- Dynamic IP
- Static IP
- PPPoE
- PPTP
- L2TP
- DS-Lite
- Wireless 2.4GHz
- Wireless 5GHz
- Parental Controls
- Guest Network
- IPv6
- Firewall
- VPN
- USB Port
- Advanced
- Tools**

ENGINOS DHCP SERVER

DHCP Server:

Lease Time:

Start IP:

End IP:

Domain Name:

special requirements. Usually, you do not need to make any changes on this section. Please keep the default value if you are uncertain about these settings.

IP Auto Change:
If router's IP address conflict with another system on the network, it will automatically change its IP address to 10.0.0.1. to access the Internet successfully.

Cloud Services

- EnShare
- EnRoute
- EnTalk Lite
- EnViewer

Device Management

- System
- Internet
- Wireless 2.4GHz
- Wireless 5GHz
- Parental Controls
- Guest Network
- IPv6
- Firewall
- VPN
- USB Port
- Advanced
- Tools**

Firmware

Manual Firmware Upgrade

You can upgrade the firmware of the router in this page. Ensure, the firmware you want to use is on the local hard drive of your computer. Click on Browse to browse and locate the firmware to be used for your update.

File Upload: No file chosen

Auto Firmware Upgrade Enable Disable

TIPS

Firmware is the core-function software that runs on your router. Usually, you are not required to upgrade your firmware. This section allows you to upgrade firmware released on EnGenius official web site. Warning: upgrading firmware under unstable environment may damage the device and result in malfunction. DO NOT upgrade firmware wirelessly to avoid accidental interference or disconnection during the process. It is always safer to upgrade firmware over Ethernet (LAN port) with all other clients disconnected.

10. Select the Zappie firmware file you saved to your computer earlier and then click the “Apply” button

11. The upgrade process will take approximately two minutes. Do not turn off the router.

12. Once the update is complete, your PC should receive an IP address in the range of 100.88.66.X. Try navigating to any non-SSL domain, eg <http://www.google.com> and you should be redirected to the router sign up page. You can also look for “Zappie Hotspot” on your WiFi-enabled device, this will also redirect to the router sign up page. Signing up is free and simply ties your router with a Zappie operator's account.